

# AQUALISA



## OPTIC Q™

OPQ.A2.BV.  
DVFC.20


WITH ADJUSTABLE HEAD AND CEILING FIXED DRENCHER - GRAVITY PUMPED

### DIMENSIONAL DRAWINGS


#### FIXED CEILING DRENCHER

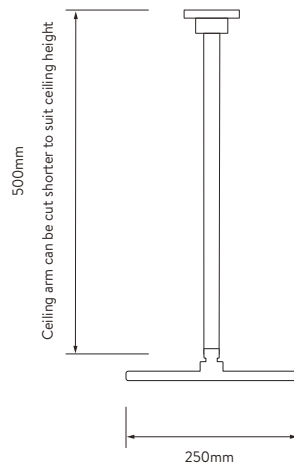


#### CONTROLLER

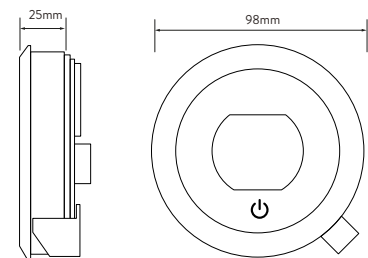


#### SHOWER RAIL KIT

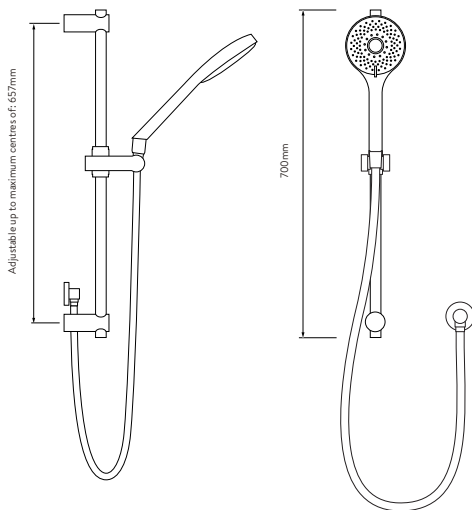


#### SHOWER HEAD

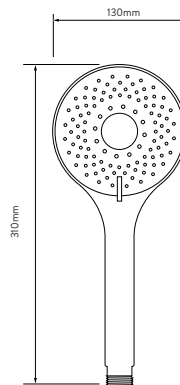


#### AQUALISA SMARTVALVE™

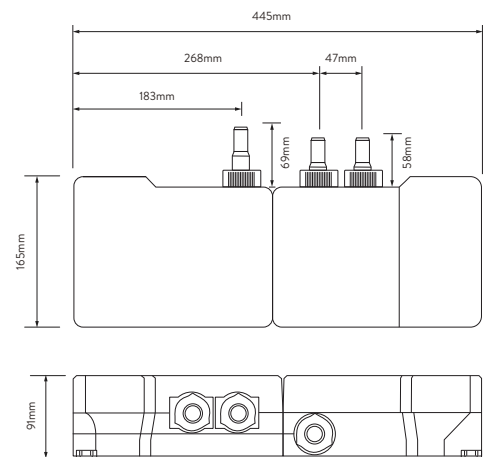

#### SHOWER HOSE

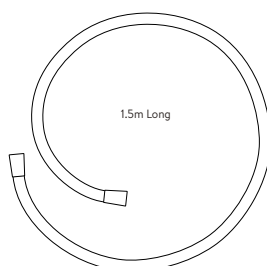

#### DIVERTER

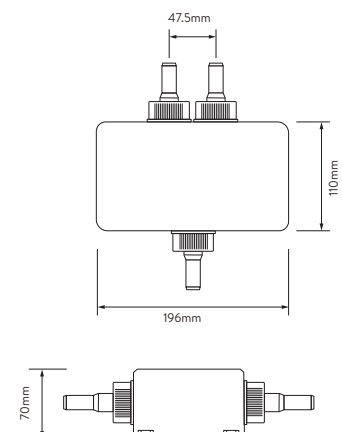

# AQUALISA

## OPTIC Q™

OPQ.A2.BV.  
DVFC.20

WITH ADJUSTABLE HEAD AND CEILING FIXED DRENCHER - GRAVITY PUMPED

### TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| Minimum pressure requirements                                  | Aqualisa SmartValve™ must be sited no higher than the base level of the cold water system                                       |
| Maximum pressure requirements                                  | 1 bar (Gravity)   |
| Aqualisa SmartValve™ inlet fitting connections                 | 15mm push fit fittings, valve inlet centres 48mm, inlet supply positions – hot right, cold left                                 |
| Aqualisa SmartValve™ and diverter outlet connections           | 15mm push fit   |
| Permissible Aqualisa SmartValve™ and diverter siting locations | Loft, airing cupboard, under bath   |
| Supply temperature   | Cold inlet temperature 1°C (minimum)<br>Cold inlet temperature 15°C (maximum)<br>Hot inlet temperature 65°C (maximum)           |
| Water system   | Gravity   |
| Features   | Proximity sensor (to wake controller up)  |
|  | Large rotary temperature ring   |
|  | Digital display system  |
|  | User definable shower profiles / experiences (available via the Aqualisa app)   |
|  | Warm and ready indicator  |
|  | Optical on off switch   |
|  | Unique Q™ lever control   |
|  | Magnetically damped Q™ lever  |
|  | 130mm Vita™ shower head with 3 spray patterns   |
|  | Wi-Fi & App compatible – control your product with your smart phone and smart home device e.g. Alexa                            |
|  | App functions include start/stop, set your flow and temperature, shower timer, user dashboard, usage tracker and help & support |
|  | Aqualisa SmartValve™  |
|  | Optional wireless rechargeable remote control   |
|  | You can select the shower outlet you want to start first everytime  |
| Digital diverter technology                                    |   |
| Guarantee period   | 5-year guarantee - shower unit  |
|  | 2-year guarantee - shower head and kit  |
| Approvals  | CE Marking  |
|  | BEAB  |