

# PM2 SQSHXDIV C

## PRISM Shower Range Prism Exposed Sequential Shower Valve with Diverter and Rigid Riser Kit



### Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes diverter, shower rose, rigid riser, rub-clean anti-limescale handset and hose


### Product Certifications:



WRAS Cert. Number: 2207908  
WRAS Expiry Date: 31/07/2027




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Sequential Shower Valve
Shower Head Type:	Fixed Head and Handset
Valve/Cartridge Type:	Thermostatic Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for high pressure plumbing systems only
Working Pressure Range:	Min: 1 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

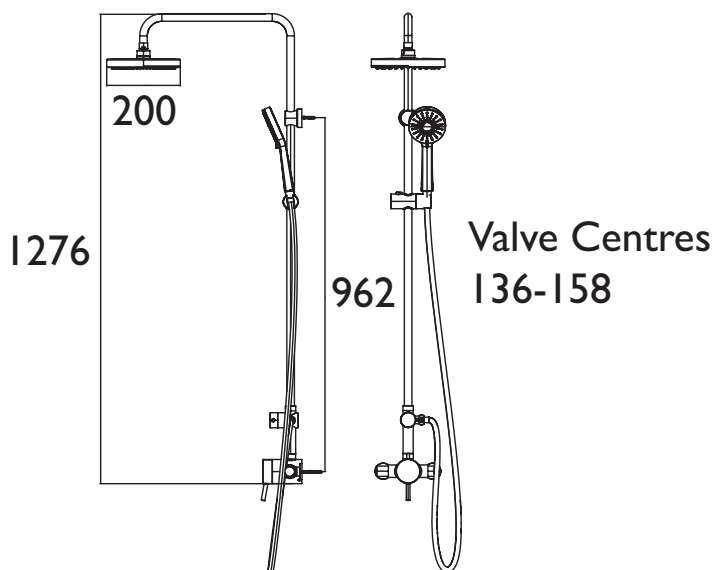

### Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
Through Fixed Head with Flow Regulators	6.4	9.4	11.6	13.4	14.5
Through Fixed Head w/o Flow Regulators	6.6	9.5	11.9	13.7	15.5
Through Handset with Flow Regulators	5.2	7.7	9.6	11.1	12.6
Through Handset w/o Flow Regulators	5.3	7.8	9.8	11.3	13.1

## TECHNICAL DATA SHEET



# BRISTAN

TAPS & SHOWERS

D5