

PM2 SHC3STP C

PRISM Shower Range Prism Recessed Thermostatic Dual Control Shower Valve with Integral Twin Stopcocks Chrome



Features:

- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Fully servicable from the front
- Metal back plate and handles for added durability
- Supplied with wall outlet

Product Certifications:



WRAS Cert. Number: 2007908
WRAS Expiry Date: 31/08/2025




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|--|
| Finish/Colour: | Gold Plated |
| Main Construction Material: | Brass |
| No of Controls: | 3 |
| Shower Type: | Recessed Dual Control |
| Shower Head Type: | None |
| Valve/Cartridge Type: | Thermostatic & 3/4" Ceramic Disc Valve |
| Minimum Dynamic Pressure: | 0.2 bar |
| Maximum Dynamic Pressure: | 5.0 bar |
| Maximum Static Pressure: (bar) | 10 |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Pre-set Outlet Temperature °C: | 42 |
| Plumbing System Suitability: | Suitable for all plumbing systems |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | 15mm Compression |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

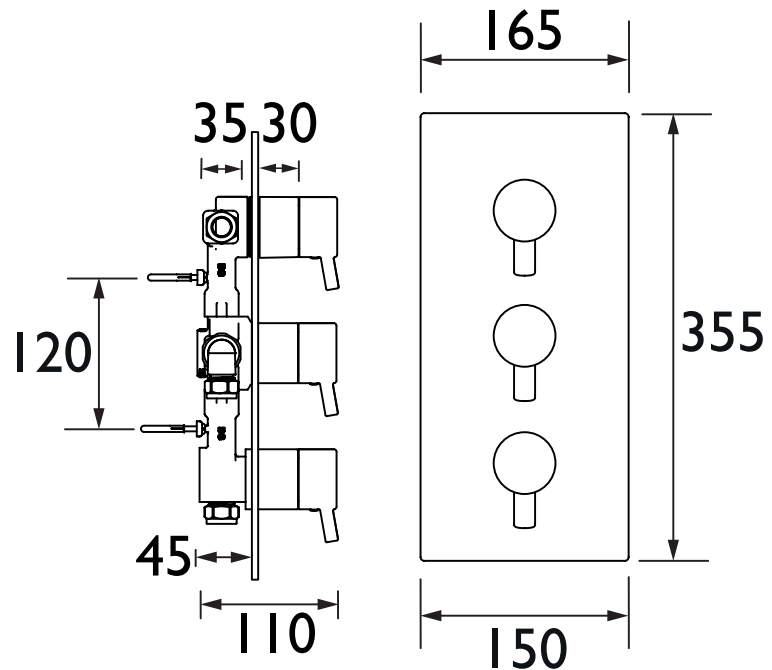

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|------|------|------|----|------|
| Outlet | 7.7 | 14.2 | 20.7 | 29.3 | 36 | 46.3 |

TECHNICAL DATA SHEET



BRISTAN

D7