

SOQ2 SHCAR C

SONIQUE Shower Range Sonique2 Thermostatic Recessed Shower Valve with Adjustable Riser Chrome



Features:

- 15mm inlet connections
- 150mm inlet centres
- Thermostatic cartridge with preset temperature stop at 42°C
- TMV2 thermostatic control for a higher level of performance and protection
- Supplied with 1 x 7L/min and 1 x 5L/min flow regulators

Product Certifications:



WRAS Certificate No: 1904904
WRAS Expiry Date: 30/04/2024



TMV2 Certificate No: NSF2124/0619
TMV2 Expiry Date: 13/06/2024




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Thermostatic
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	80
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compressions
Connection Outlet:	G 1/2"

Dimensions (measurements in mm)

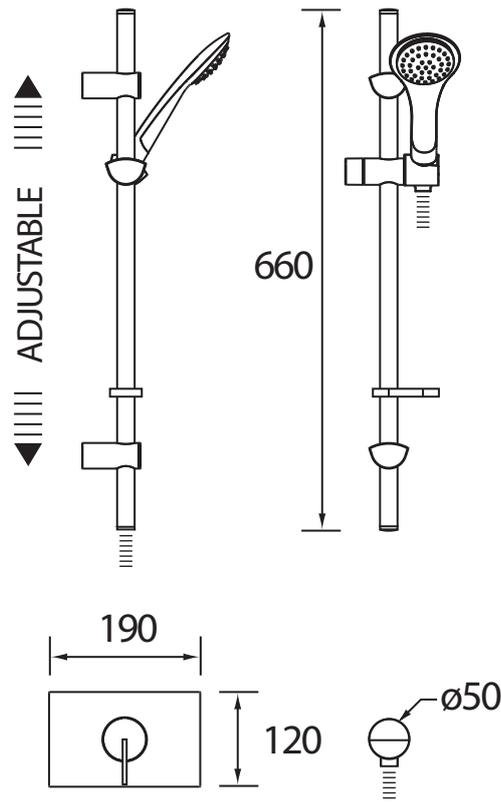

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	7	15.6	22.1	31.2	38.2	49.3
Through Handset (mixed)	1.6	3.6	5	7.1	8.7	11.2

TECHNICAL DATA SHEET



BRISTAN

D6