


COLONIAL COLONIAL THERMOSTATIC SURFACE MOUNTED SHOWER VALVE WITH ADJUSTABLE RISER



Product Specification

Product Code:	KN SHXAR C
Finish:	Chrome
Product Type:	Traditional
Construction:	Body is of brass construction
Cartridge Type:	Thermostatic cartridge
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connections:	15mm compression elbows
Outlet Connection:	G 1/2"
Water Pressure:	Min. 0.1 bar, Max. 5.0 bar
Dimensions for Fitting:	148-152mm inlet centres

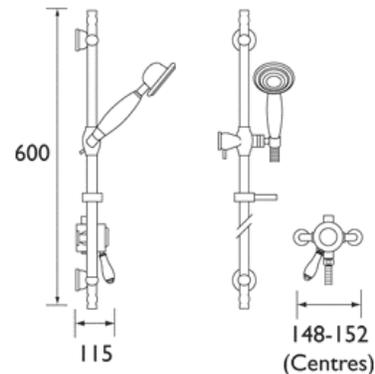

Additional Information

- Single Lever Control - Flow and temperature are controlled by an easily operated single handle.
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure providing a stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of injury.
- Factory set to a maximum of 43°C to eliminate the ability to select an unsafe temperature - this can be adjusted to suit user preference.
- Swivel inlet elbows with 148-152 centres, valves can be fed from top, bottom or rear.
- Supplied with 1.5m shower hose, riser rail, hose retainer and single function handset.
- Chrome plated to BS EN 248.

Technical Advice: For further information please call 0844 7016273 or email customer care@bristan.com
Guarantee: 5 years covering manufacturing faults.

Compliance/Approvals

WRAS: Certificate No. 0906010



Flow Rates (litres per minute, open outlet)

System Pressure	0.1bar	0.2bar	0.4bar	0.6bar	0.8bar	1bar
Filters fitted	7.6	11.3	17.0	21.0	24.7	27.7
System Pressure	0.5bar	1bar	2bar	3bar	4bar	5bar
Flow regulators fitted	7.6	8.3	7.5	8.3	8.6	8.9