


Geberit WC flush control with electronic flush actuation, mains operation, single flush, Sigma10 flush plate for pull-down rail, radio

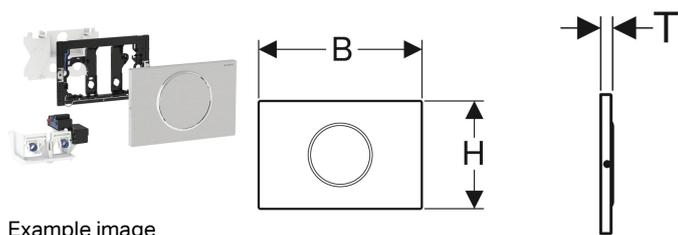

Example image

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with RF-controlled button
- For single flush
- For solid and drywall construction
- Suitable for less-abled installation
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Characteristics

- Flush actuation using pull-down rail, wireless, radio
- Single flush can be triggered via flush plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter

Scope of delivery

- Sigma10 flush plate
- Mounting frame
- Protection plate
- Actuator rod

- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Screwable flush plate

Technical data

Protection degree	IP45
Nominal voltage	85-240 V AC
Mains frequency	50-60 Hz
Operating voltage	12 V DC
Power consumption	≤ 4 W
Power consumption standby	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	24 h
Interval flush time, adjustment range	1-200 s
Interval flush time, factory setting	5 s

- Support block with servomotor and lifting device, premounted
- Control electronics with radio receiver
- Fastening material

To order additionally

- Geberit Power & Connect box
- Geberit power supply unit for Power & Connect box

Art. no.	Colour / surface	Material designation	B	H	T	
115.867.16.6	Plate and button: black matt coated, easy-to-clean coated Design ring: black	Stainless steel	24.6 cm	16.4 cm	1.5 cm	New