


Geberit WC flush control with electronic flush actuation, mains operation, dual flush, Sigma80 flush plate, touchless



Example image

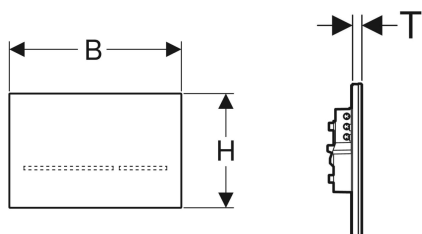

Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for less-abled installation

Characteristics

- Touchless manual flush actuation
- Automatic flush actuation can be activated
- Flush actuation possible via external push-button
- Flush plate without mechanical buttons
- Actuator buttons identifiable by light bars
- Button illumination activated when approached
- Button illumination can be set in five colours
- Orientation light can be activated
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- Reliable IR distance detection
- User detection range can be set
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set

- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Flush actuation can be deactivated
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Lockable
- Easy maintenance and cleaning

Technical data

| | |
|---------------------------------------|-------------|
| Protection degree | IP45 |
| Nominal voltage | 85-240 V AC |
| Mains frequency | 50-60 Hz |
| Operating voltage | 12 V DC |
| Power consumption | ≤ 4 W |
| Power consumption standby | 0.15 W |
| Interval flush, adjustment range | 1-168 h |
| Interval flush, factory setting | Off |
| Interval flush time, adjustment range | 1-200 s |
| Interval flush time, factory setting | 5 s |
| Detection time, adjustment range | 1-60 s |
| Detection time, factory setting | 7 s |

Scope of delivery

- Sigma80 flush plate
- Mounting frame

- Support block with servomotor and lifting device, premounted

To order additionally

- Geberit Power & Connect box

- Geberit power supply unit for Power & Connect box

| Art. no. | Colour / surface | Material designation | B | H | T |
|--------------|---------------------------|----------------------|---------|---------|------|
| 116.090.SG.6 | black / glass, reflective | Glass | 24.7 cm | 16.4 cm | 1 cm |
| 116.090.SM.6 | glass, reflective | Glass | 24.7 cm | 16.4 cm | 1 cm |

Accessories

- Geberit Service Handy