


Geberit WC flush control with electronic flush actuation, battery operation, dual flush, type 10 IR button

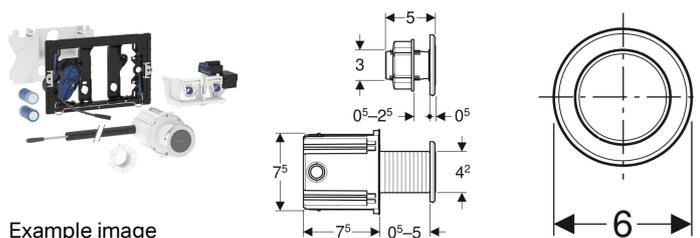

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using a touchless IR button
- For releasing a dual flush
- For installation in solid and drywall constructions with flush-mounting box
- For installation in bathroom furniture with counternut
- Suitable for less-abled installation
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Characteristics

- Touchless manual flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Single or dual flush can be triggered via flush plate
- Can be combined with flush plates Sigma01 to Sigma60 or Geberit cover plates
- Battery-operated
- Batteries in closed battery compartment in the flushing cistern
- With push-fit connection with cross-polarity protection
- Interval flush preset

Scope of delivery

- Infrared button with 2 m connection cable
- Concealed outlet
- Counternut
- Conduit pipe, length 1.7 m
- Mounting frame with battery compartment, premounted

- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating

Technical data

| | |
|---------------------------------------|---------|
| Battery type | LR20 |
| Protection degree | IP45 |
| Operating voltage | 3 V DC |
| Power consumption | ≤ 4 W |
| Power consumption standby | 0.15 W |
| Interval flush, adjustment range | 1-168 h |
| Interval flush, factory setting | 24 h |
| Interval flush time, adjustment range | 1-200 s |
| Interval flush time, factory setting | 3 s |

- Protection plate
- Support block with servomotor and lifting device, premounted
- Electrical control
- 2 alkaline manganese batteries LR20, each 1.5 V

To order additionally

- Actuator plate or cover plate

| Art. no. | Colour / surface | Material designation | B | H | T | |
|--------------|------------------|----------------------|------|------|--------|-----|
| 115.937.SN.6 | Collar: brushed | Stainless steel | 6 cm | 6 cm | 0.5 cm | |
| 115.937.14.6 | black matt | Brass | 6 cm | 6 cm | 0.5 cm | New |