


Geberit WC flush control with electronic flush actuation, mains operation, dual flush, type 10 IR button

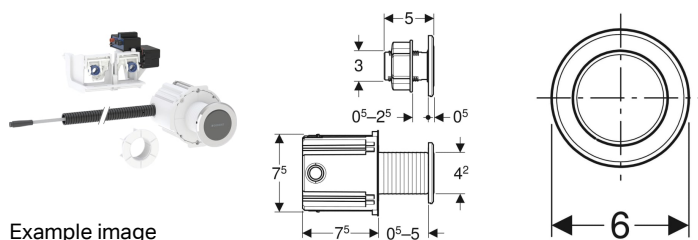

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using a touchless IR button
- For releasing a dual flush
- For installation in solid and drywall constructions with flush-mounting box
- For installation in bathroom furniture with counternut
- Suitable for less-abled installation
- For Sigma concealed cisterns 12 cm

Characteristics

- Touchless manual flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Single or dual flush can be triggered via flush plate
- Can be combined with Sigma01 to Sigma70 actuator plates or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Interval flush preset
- Adjustable interval flush

Scope of delivery

- Infrared button with 2 m connection cable
- Concealed outlet
- Counternut

To order additionally

- Actuator plate or cover plate
- Geberit Power & Connect box

- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating

Technical data

Protection degree	IP45
Nominal voltage	85-240 V AC
Mains frequency	50-60 Hz
Operating voltage	12 V DC
Power consumption	≤ 4 W
Power consumption standby	0.15 W
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	24 h
Interval flush time, adjustment range	1-200 s
Interval flush time, factory setting	5 s

- Conduit pipe, length 1.7 m
- Support block with servomotor and lifting device, premounted
- Electrical control

- Geberit power supply unit for Power & Connect box

Art. no.	Colour / surface	Material designation	B	H	T	
115.936.SN.6	Collar: brushed	Stainless steel	6 cm	6 cm	0.5 cm	
115.936.14.6	black matt	Brass	6 cm	6 cm	0.5 cm	New