

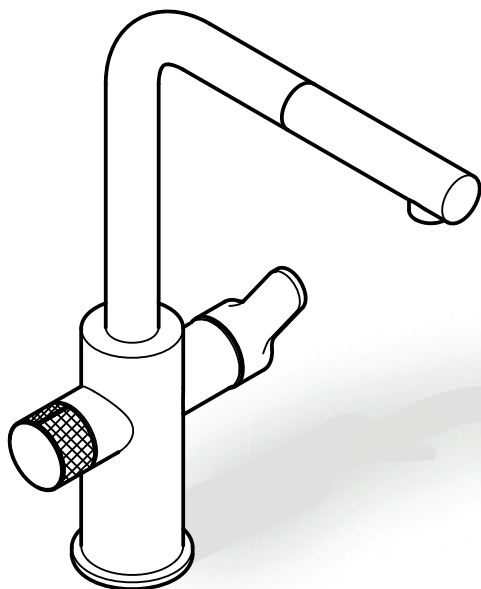




<u>*40 405</u>	<u>*40 438 (S-Size)</u> <u>*40 875(Mg+Zn)</u> <u>*40 876 (U-Safe)</u>	<u>*41 136(AC)</u>
<u>*40 437</u> 6x	<u>*40 877 (RO)</u>	<u>*40 878 (RO+)</u>

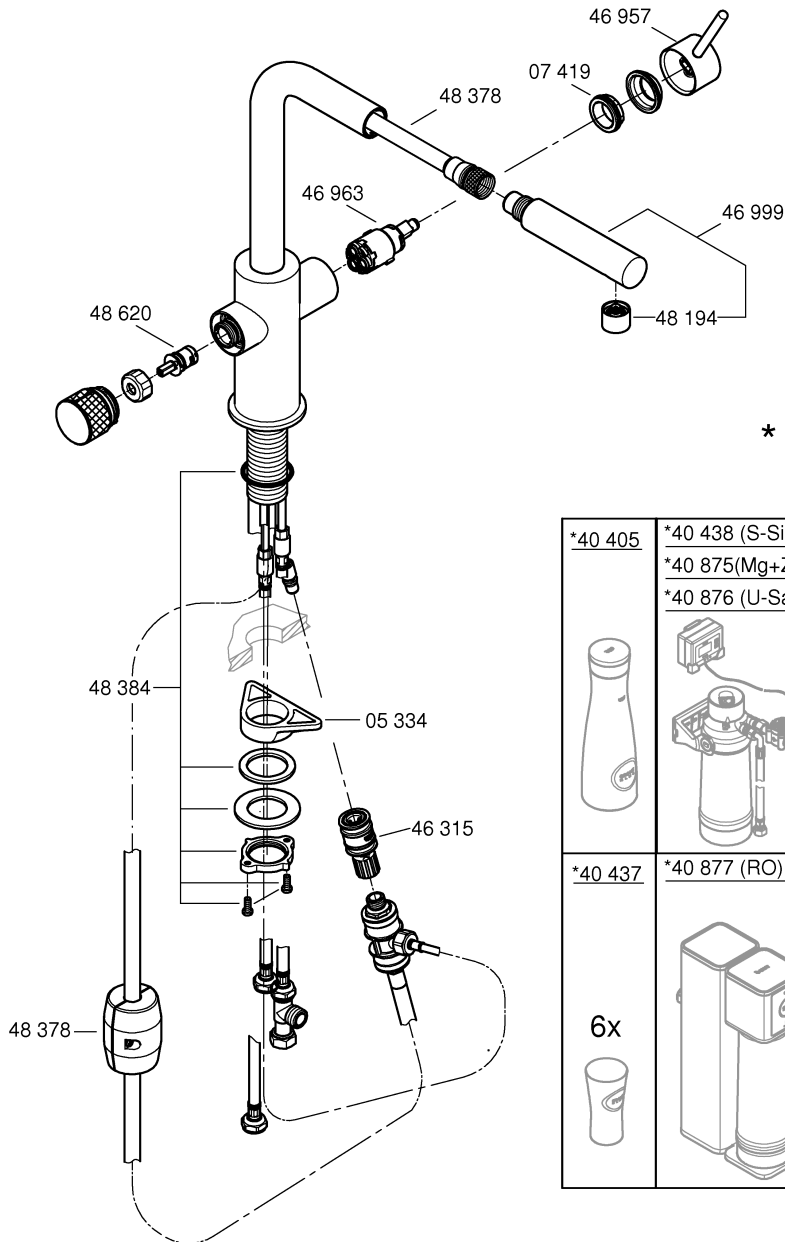

DIN EN
806

DIN EN
1717

DIN
1988






bar





max.
10
0,5 5
1

max.
70°
60°




1

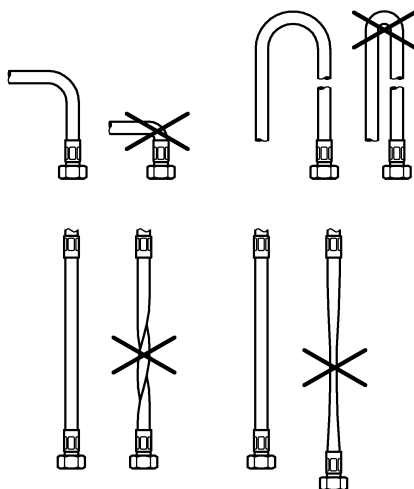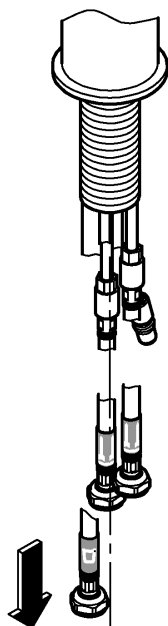





2

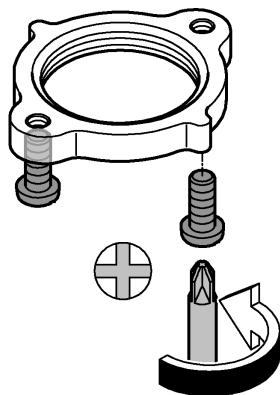

3

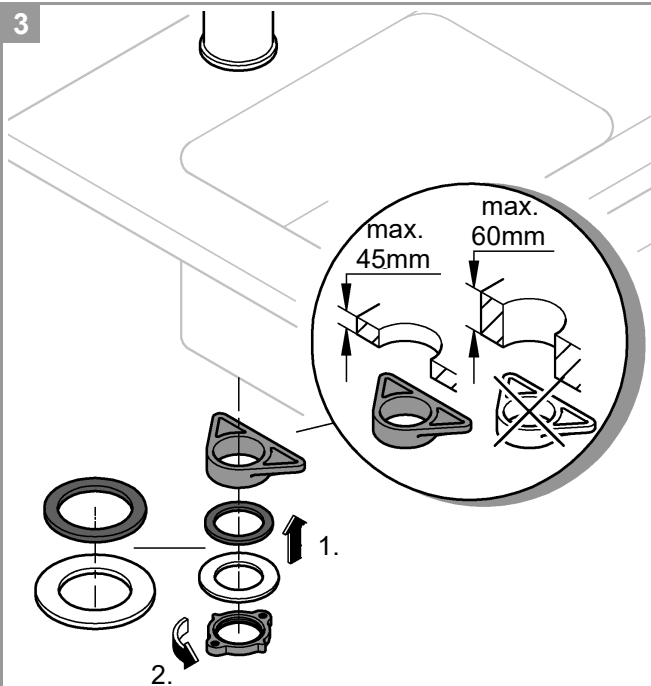


4

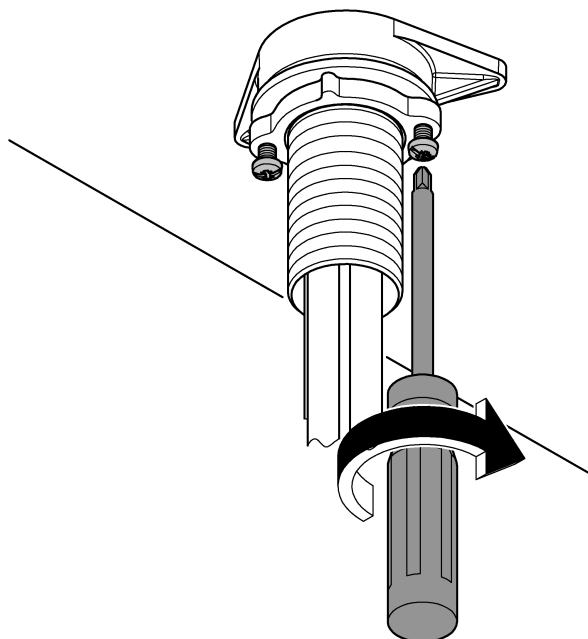





5

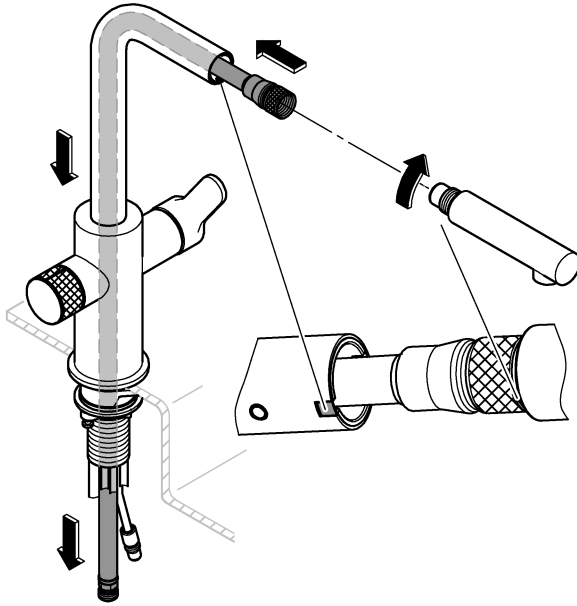


6

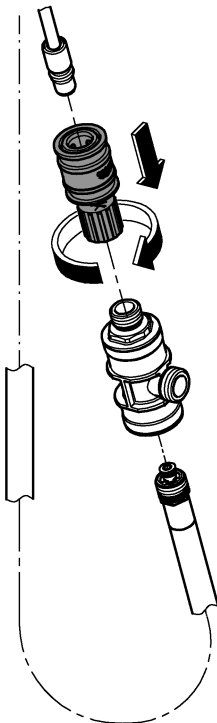

7


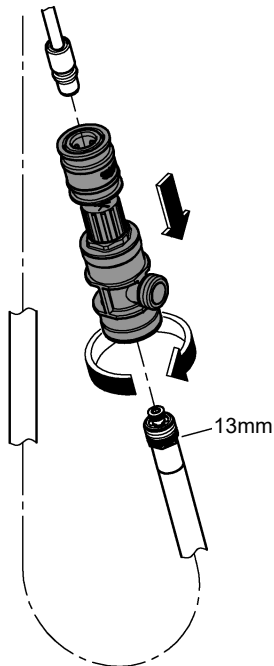


8



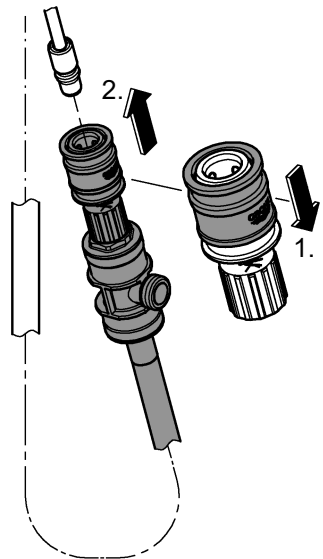




9

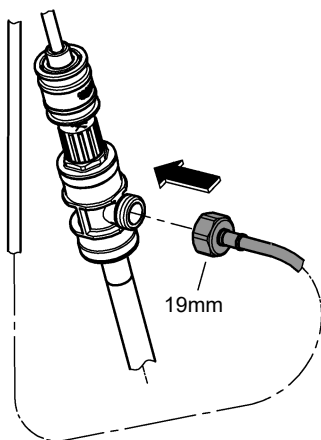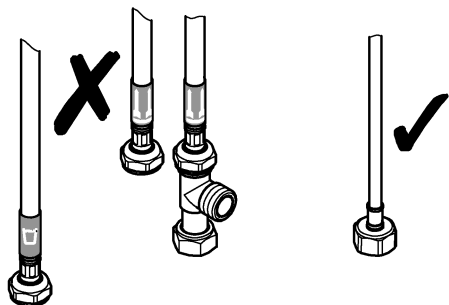


10

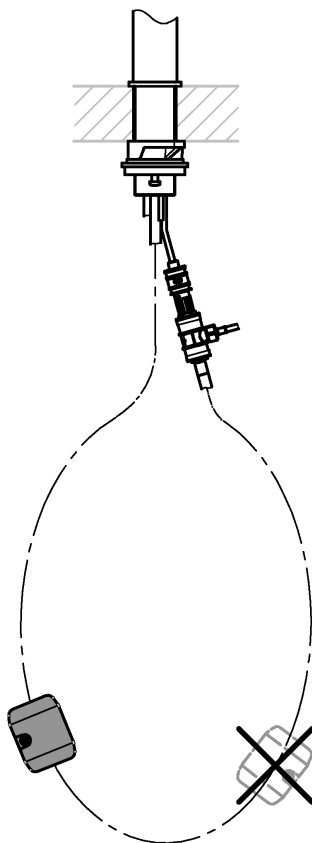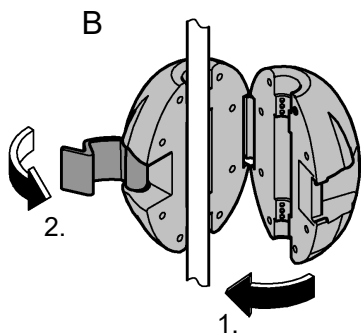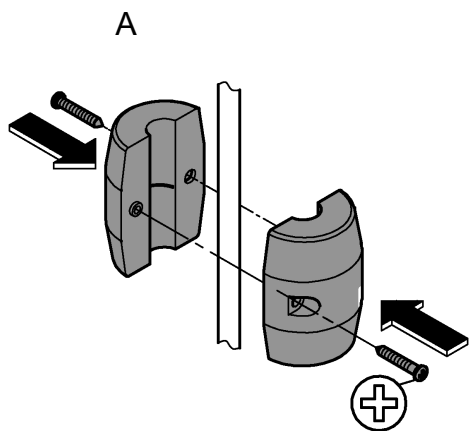





11



12




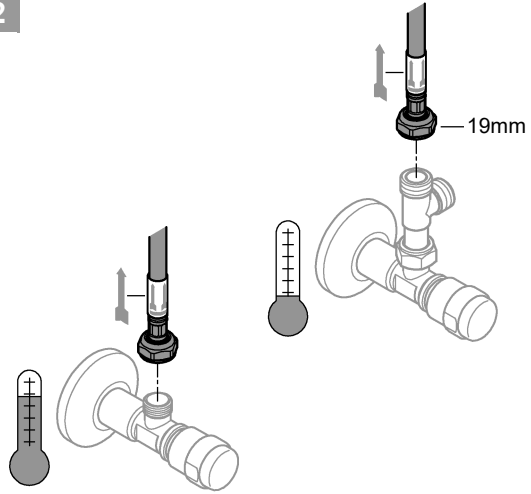








13

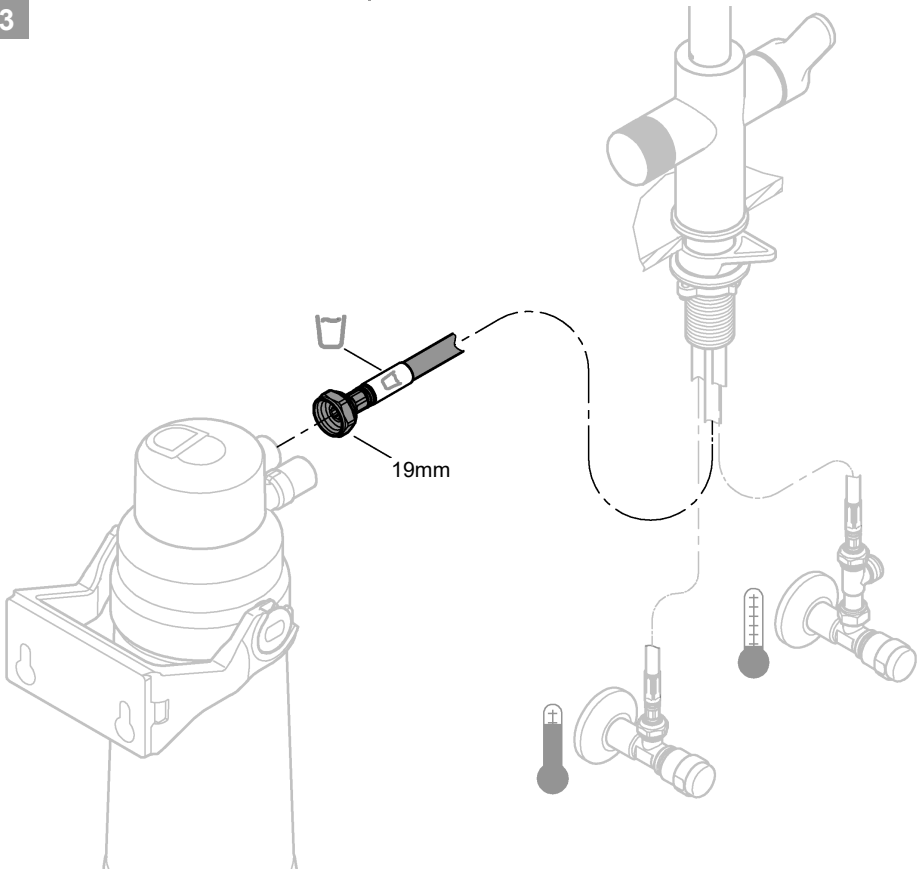





14

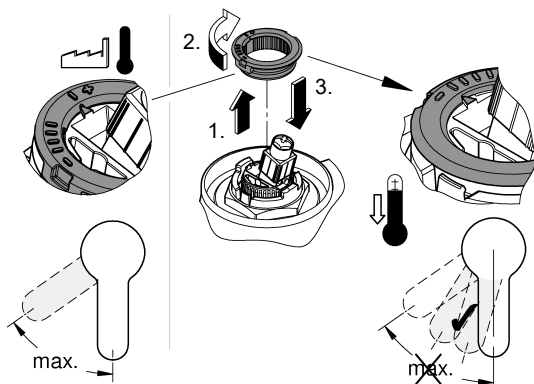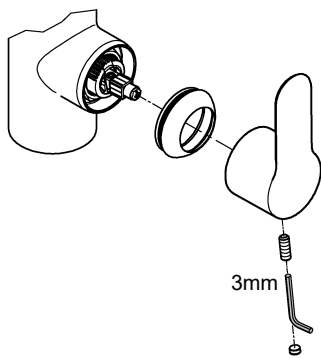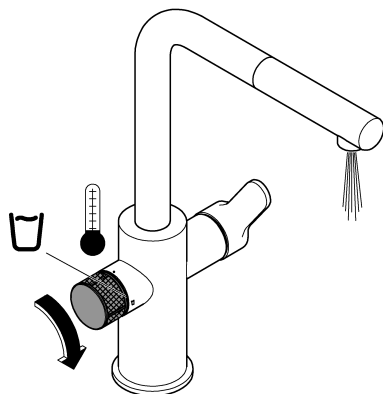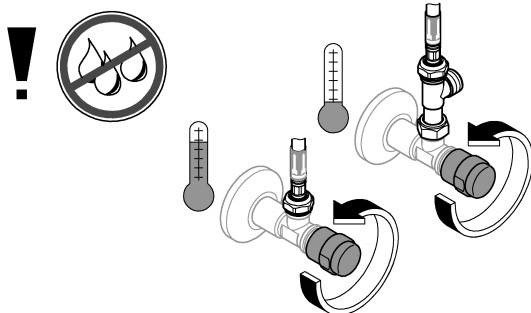

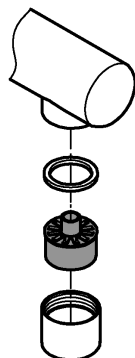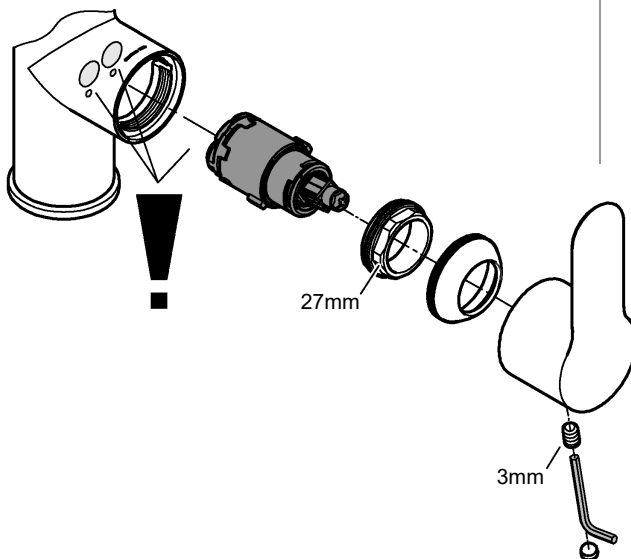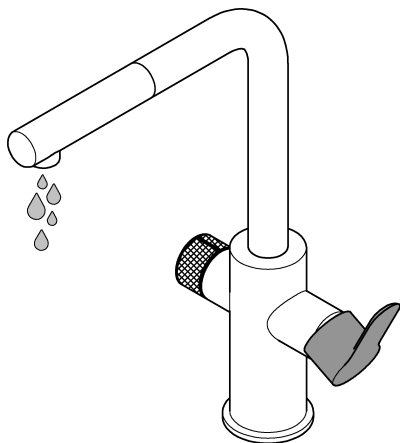





1

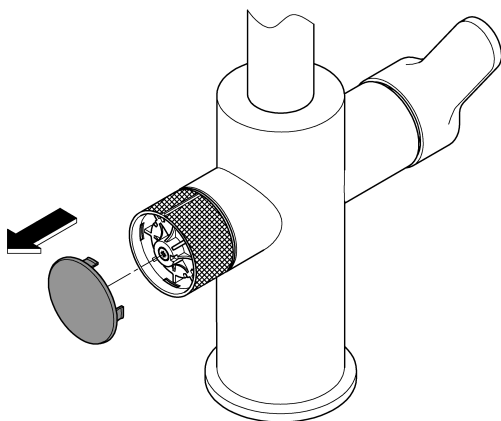


2

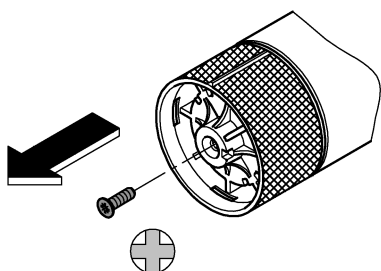


3

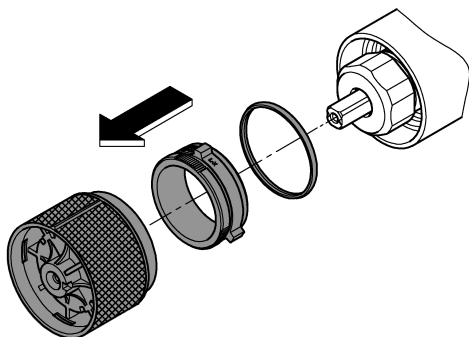

4

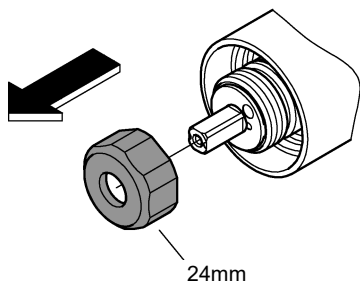

5

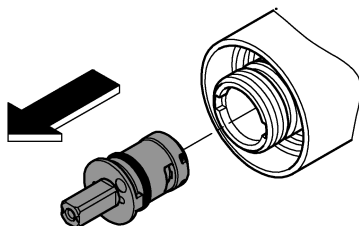



6



