

ASPIRANTE


BRAQUE
Riser rail assembly



INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER

BRAQUE RISER RAIL ASSEMBLY

Fig.1

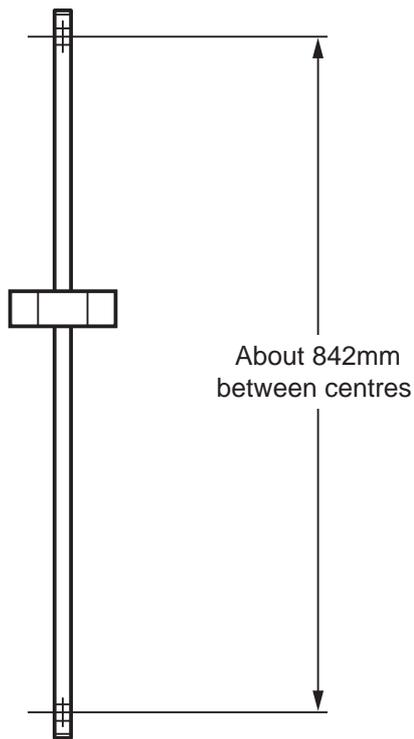

WARNING!

Check there are no hidden cables or pipes before drilling holes for wall plugs. Use great care when using power tools near water. The use of a residual current device (RCD) is recommended.

Decide the position for the rail on the wall within the shower area. Proceed as follows:

Mark the centre hole position for the top and bottom wall brackets (**fig.1**) then drill and plug the wall. (*The wall plugs provided are suitable for most brick walls – use an appropriate masonry drill, but if the wall is plasterboard or a soft building block, you must use suitable wall plugs and a suitable drill bit.*)

Using the screws supplied, screw the wall brackets to the wall.

Slide the showerhead holder onto the riser rail (**fig.2**). To secure the holder to the rail turn the knob clockwise.

Insert one of the mounting lugs into the opening at the top rear of the riser rail (**fig.3**). Push fit the trim plug into the top of the rail to secure the mounting lug in place (**fig.3**).

Repeat for the lower rail lug.

Offer the riser rail assembly to the wall brackets, and carefully insert lugs into the brackets. Using a suitable Allen key, tighten the grub screws (**fig.4**) in the base of the wall brackets to secure the riser rail to the wall.

Fig.2


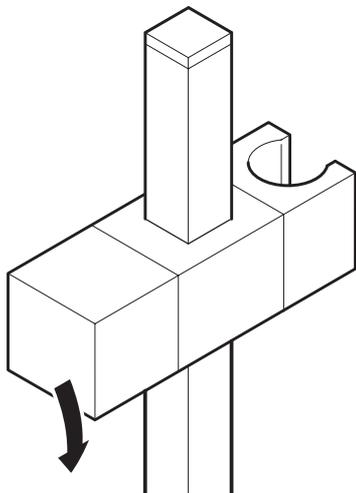


Fig.3

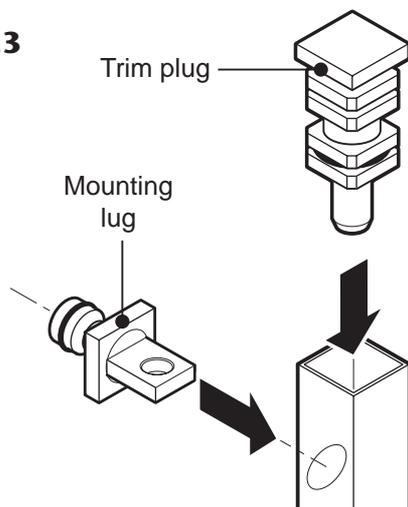

BRAQUE RISER RAIL ASSEMBLY

FITTING THE HOSE AND SHOWERHEAD




Screw the flexible hose to the shower outlet and showerhead, making sure the supplied washers are in place at both ends of the flexible hose (**fig.5**).

Place the showerhead into the holder and check that it fits correctly (**fig.6**).

Note: The holder is slightly tapered and the showerhead and hose will only fit from one direction.


IMPORTANT: It is the conical end of the hose which grips into the holder. The showerhead will not fit in the holder without the hose attached.

IMPORTANT: This riser rail assembly is NOT supplied with a hose retainer. Water Regulations require the fitting of a double check valve, or similar device, in the supply pipework to prevent backflow.

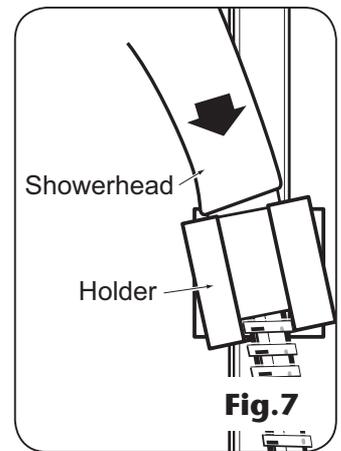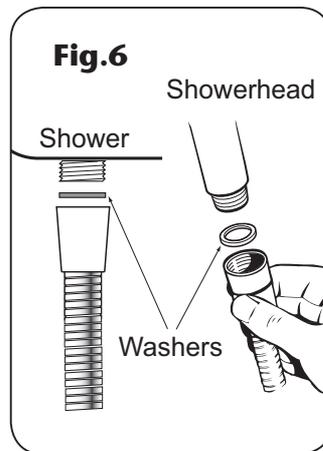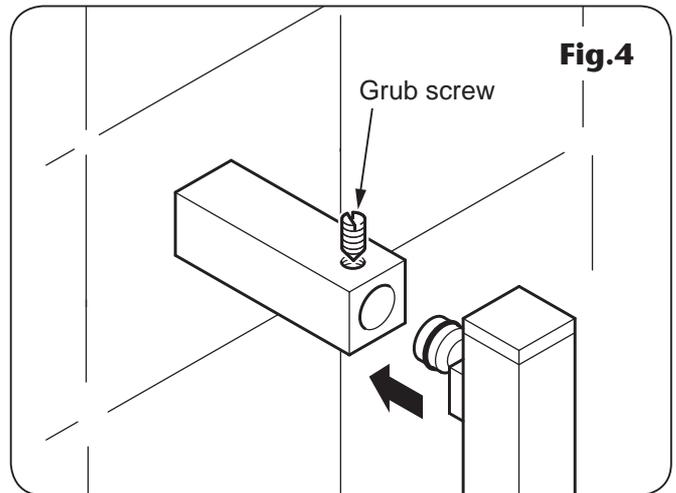

SPARE PARTS

Ref	Description	Spares No.
–	Kit (without riser rail)	88900006
A	End bracket assembly	83309520
B	Riser rail	88800006
C	Slider assembly (Qty 1)	83309530
–	1.25m flexi hose – chrome	28100000
–	1.75m flexi hose – chrome	28100010

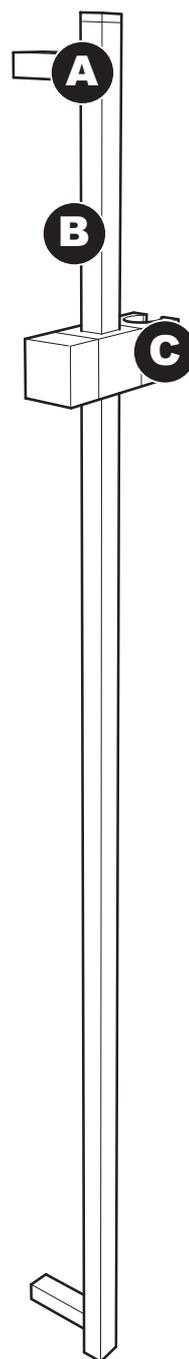

TRITON STANDARD GUARANTEE

Triton guarantee this product against defects arising from faulty workmanship or materials for a period of one year for domestic use only, from the date of purchase, provided that it has been installed by a competent person in full accordance with the fitting instructions.

Any part found to be defective during this guarantee period we undertake to repair or replace at our option without charge so long as it has been properly maintained and operated in accordance with the operating instructions, and has not been subject to misuse or damage.

This product must not be taken apart, modified or repaired except by a person authorised by Triton. This guarantee applies only to products installed within the United Kingdom and does not apply to products used commercially. This guarantee does not affect your statutory rights.

Customer Service: ☎ 024 7637 2222

**Scottish and Northern Ireland
Customer Service:** ☎ 084 5762 6591

Trade Installer Hotline: ☎ 024 7632 5491

Fax: 024 7632 4564

www.aspiranteshowers.co.uk

E mail: technical@tritonshowers.co.uk

Triton
Triton Road
Nuneaton
Warwickshire CV11 4NR

Triton is a division of Norcross Group (Holdings) Limited